




Building Performance Institute, Inc.
BPI Standards



ANSI/BPI-2400-S-2012

Standard Practice for Standardized Qualification of Whole-House Energy Savings Predictions by Calibration to Energy Use History

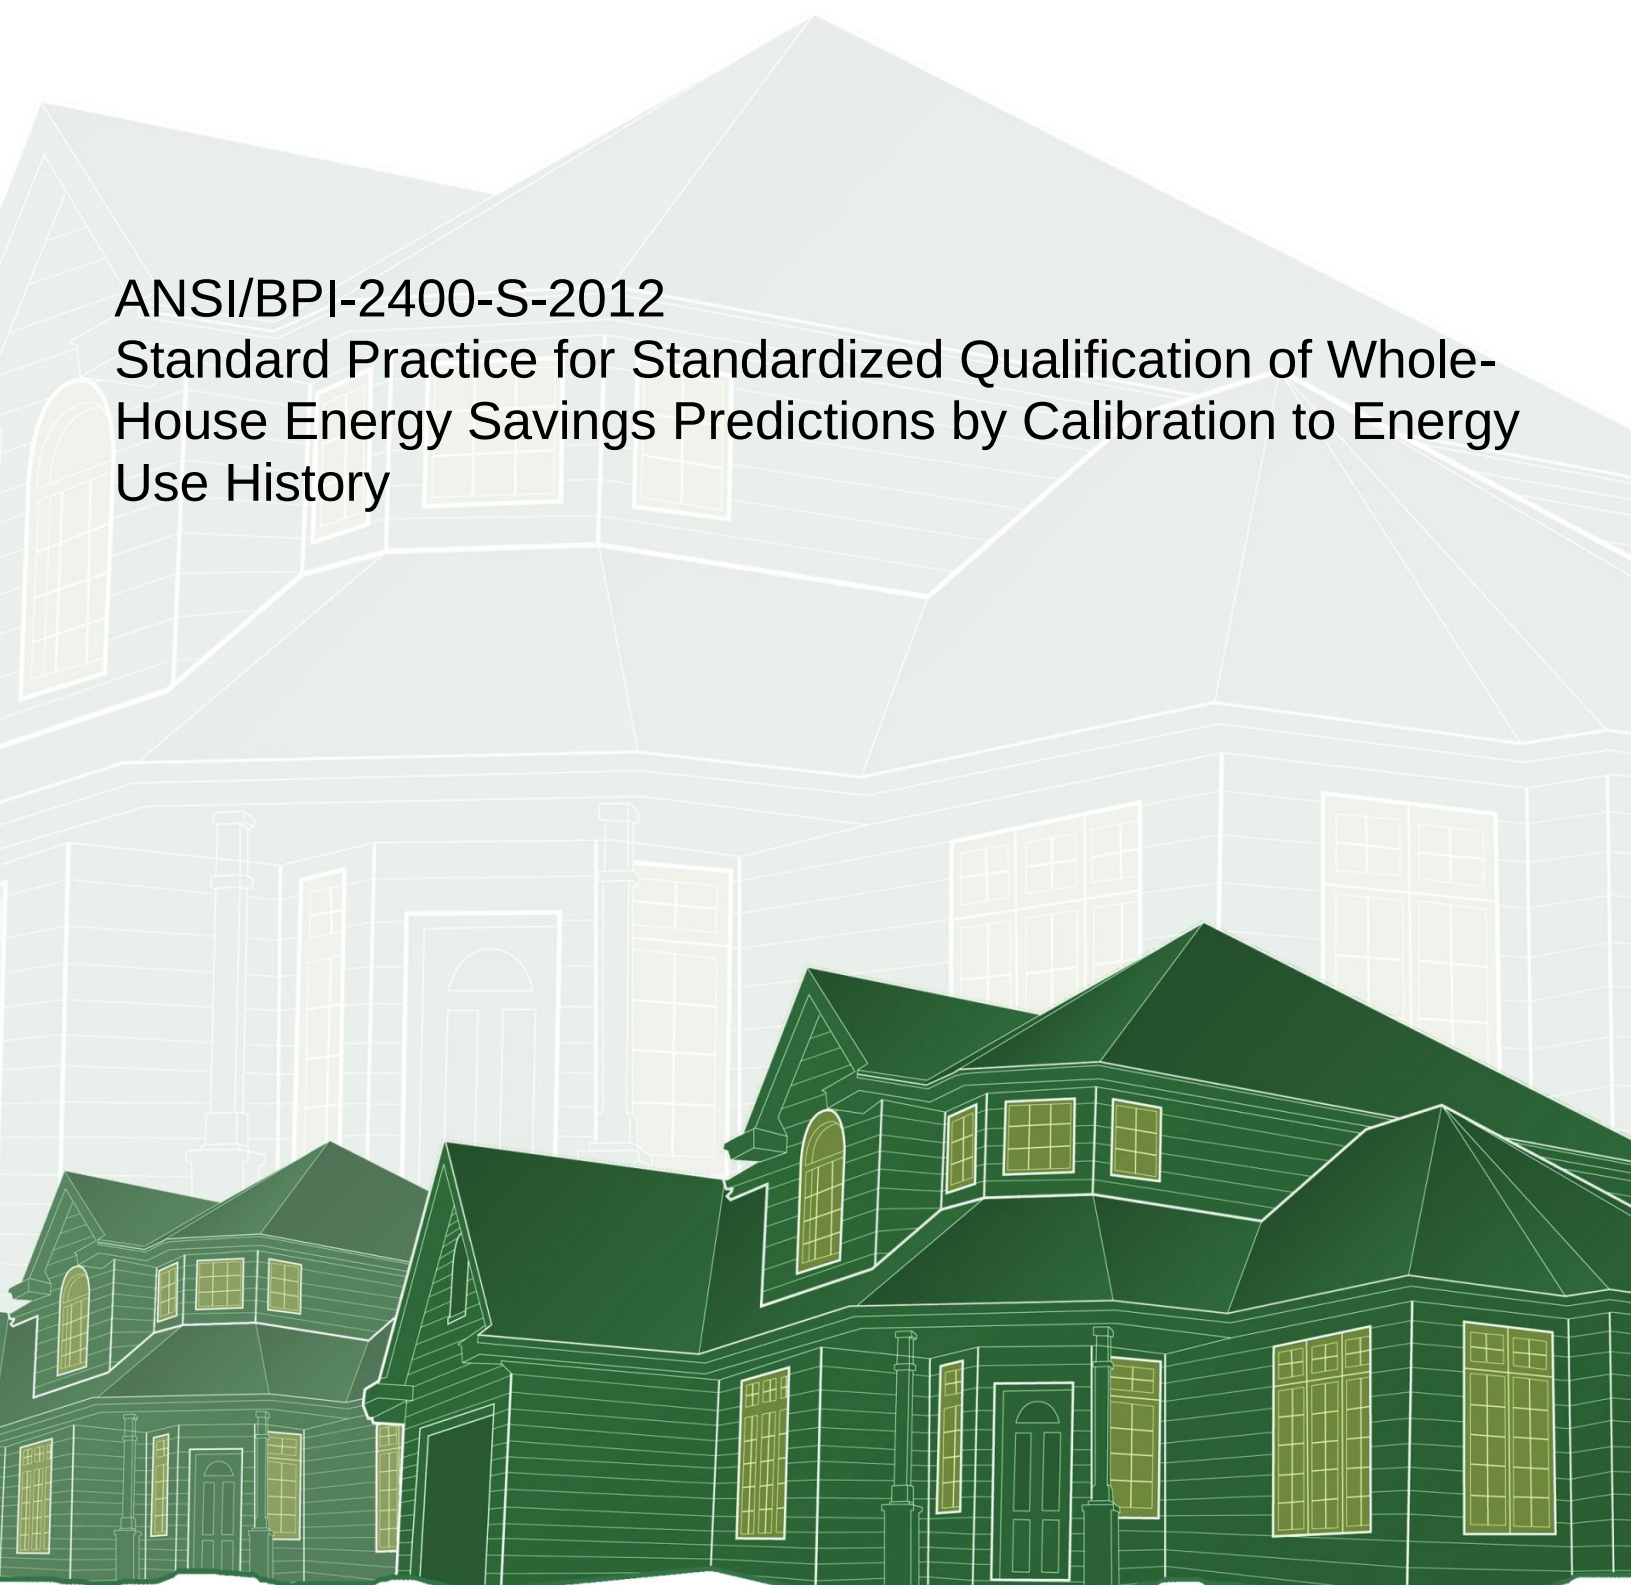

Notice

BPI standards, bulletins and other technical publications are designed to serve the public interest by eliminating misunderstandings between manufacturers, service providers and purchasers, facilitating interchangeability and improvement of products and services, and assisting the purchaser in selecting and obtaining, with minimum delay, the proper product or service for his or her particular need.

Existence of such standards, bulletins and other technical publications shall not in any respect preclude any entity affiliated with BPI (or not) from manufacturing or selling products or services not conforming to such standards, bulletins or other technical publications, nor shall the existence of such standards, bulletins and other technical publications preclude their voluntary use by those unaffiliated with BPI, whether the standard is to be used either domestically or internationally.

Standards, bulletins and other technical publications are adopted by BPI in accordance with the American National Standards Institute (ANSI) patent policy. By such action, BPI does not assume any liability to any patent owner, nor does it assume any obligation whatsoever to parties adopting the standard, bulletin or other technical publication.

This standard does not purport to address all safety problems associated with its use or all applicable regulatory requirements. It is the responsibility of the user of this standard to establish appropriate safety and health practices and to determine the applicability of regulatory limitations before its use.

This standard is formulated under the cognizance of the BPI Standards Technical Committee.

Table of Contents

Introduction (Informative)	1
1. Scope.....	1
2. Process Overview.....	1
3. Energy Model Calibration Process	3
3.1. Energy Simulation Software Criteria.....	3
3.2. Detailed Calibration.....	3
3.2.1. Detailed Calibration Procedure.....	3
3.2.2. Model Calibration Utility Bill Criteria	4
3.2.3. Detailed Model Calibration Acceptance Criteria	5
3.3. Simplified Calibration	6
3.3.1. Simplified Calibration Procedure	6
3.3.2. Model Calibration Delivered Fuel Criteria	6
3.4. Model Input Constraints	7
4. Savings Calculations	8
4.1. Operational Savings Calculation.....	8
4.2. Asset-Based Savings Calculation	8
4.2.1. Pre-Retrofit Asset Model.....	8
4.2.2. Post-Retrofit Asset Model.....	9
4.2.3. Standard Operating Conditions	9
4.3. Total Energy Savings Calculations	10
4.3.1. Equivalent Energy Use	10
4.3.2. Total Energy Savings.....	10
4.3.3. Energy Savings Percentage	10
Annex A: Referenced Documents(Normative).....	11
Annex B: Terms and Definitions(Normative).....	12
Annex C: Quality Assurance(Informative)	14
C.1 Self-Enforcement of Meeting this Standard	14
C.2 Third Party Minimum Model QA.....	14
C.3 Third Party Detailed Model QA	14
C.4 Third Party Field Review Based on Model QA	15
C.5 Enforcement.....	15
Annex D: Application of this Standard(Informative)	16
Annex E: Building Performance Institute, Inc.Types of Standards (Informative).....	17

Introduction (Informative)

Procedures described in this document are intended to increase confidence in energy savings projected by whole building simulation for single family dwellings and townhouses that undergo energy efficiency retrofits. The approach relies on setting boundaries on predicted savings by using actual pre-retrofit energy consumption (utility bills) where available, and provides an alternate approach for evaluating savings in homes where monthly utility data is available but not of sufficient quality.

The purpose of this standard is to define a procedure and the minimum requirements for calculating standardized energy savings on proposed whole house energy retrofit work based on the difference between energy usage before the energy upgrade and predicted energy use after the upgrade.

1. Scope

This standard specifies the requirements and process for the calculation of standardized predicted savings: a difference (delta simulation) between the modeled energy usage before an energy upgrade (or set of upgrades) and modeled energy use after an upgrade (or set of upgrades), using approved building energy simulation software.

This standard applies to existing detached single-family dwellings and townhouses that have independent mechanical systems for each dwelling unit (heating, cooling, water heating, and ventilation); direct access to outdoors for each dwelling unit; and were designed to have continuous party walls with no penetrations to adjacent units, with such party walls extending from ground to roof where the dwelling unit is attached to one or more adjacent single-family dwelling units.

This standard specifies a process for using an approved building energy simulation software tool and actual energy bills to calibrate the model to the actual energy use of the home, and provides a set of criteria to be used in the final calculation of standardized estimated savings that may be considered in compliance with this standard.


2. Process Overview

This standard describes a process for generating a pre-retrofit calibrated model and a process for the calculation of energy savings based on the calibrated model.

There are two paths for generating the pre-retrofit calibrated model; a detailed calibration process and a simplified calibration process. Both calibration processes have acceptance tests and criteria to determine when the pre-retrofit model is calibrated. The detailed path relies on having monthly utility bill history for each fuel using detailed calibration, while the simplified path requires only the annual consumption for each fuel. An operational model that is successfully calibrated using detailed calibration (Section 3.2.1) will typically have less uncertainty in the savings predictions than that of the simplified calibration (Section 3.3.1) and shall be used when qualified utility data are available. In the case where energy data meeting the criteria in Section 3.2.2 is available for some fuels used in the building and not others, the detailed path shall be used for the fuel(s) with qualified data. If one or more fuel(s) are used that do not meet the criteria of either Section 3.2.2 or Section 3.3.2, calibration shall not be conducted and savings shall not be reported for that fuel(s).

There are two methods for the calculation of predicted energy savings; one based on an operational model, and one based on an asset model. The predicted operational savings are calculated as the difference between the modeled fuel usage between the calibrated pre-retrofit operational model and the post-retrofit operational model, where the post-retrofit operational model is the calibrated pre-retrofit operational model adjusted for the proposed ECMS. For programs that require an asset-based calculation of predicted energy savings, calibration is first conducted on the operational model. Then the savings are calculated as stated for the operational model, except that the pre- and post-retrofit energy models' input parameters are modified to reflect standardized (asset-based) operating conditions. (See Figure 1: Process Overview Flow Chart below.)

Figure 1: Process Overview Flow Chart

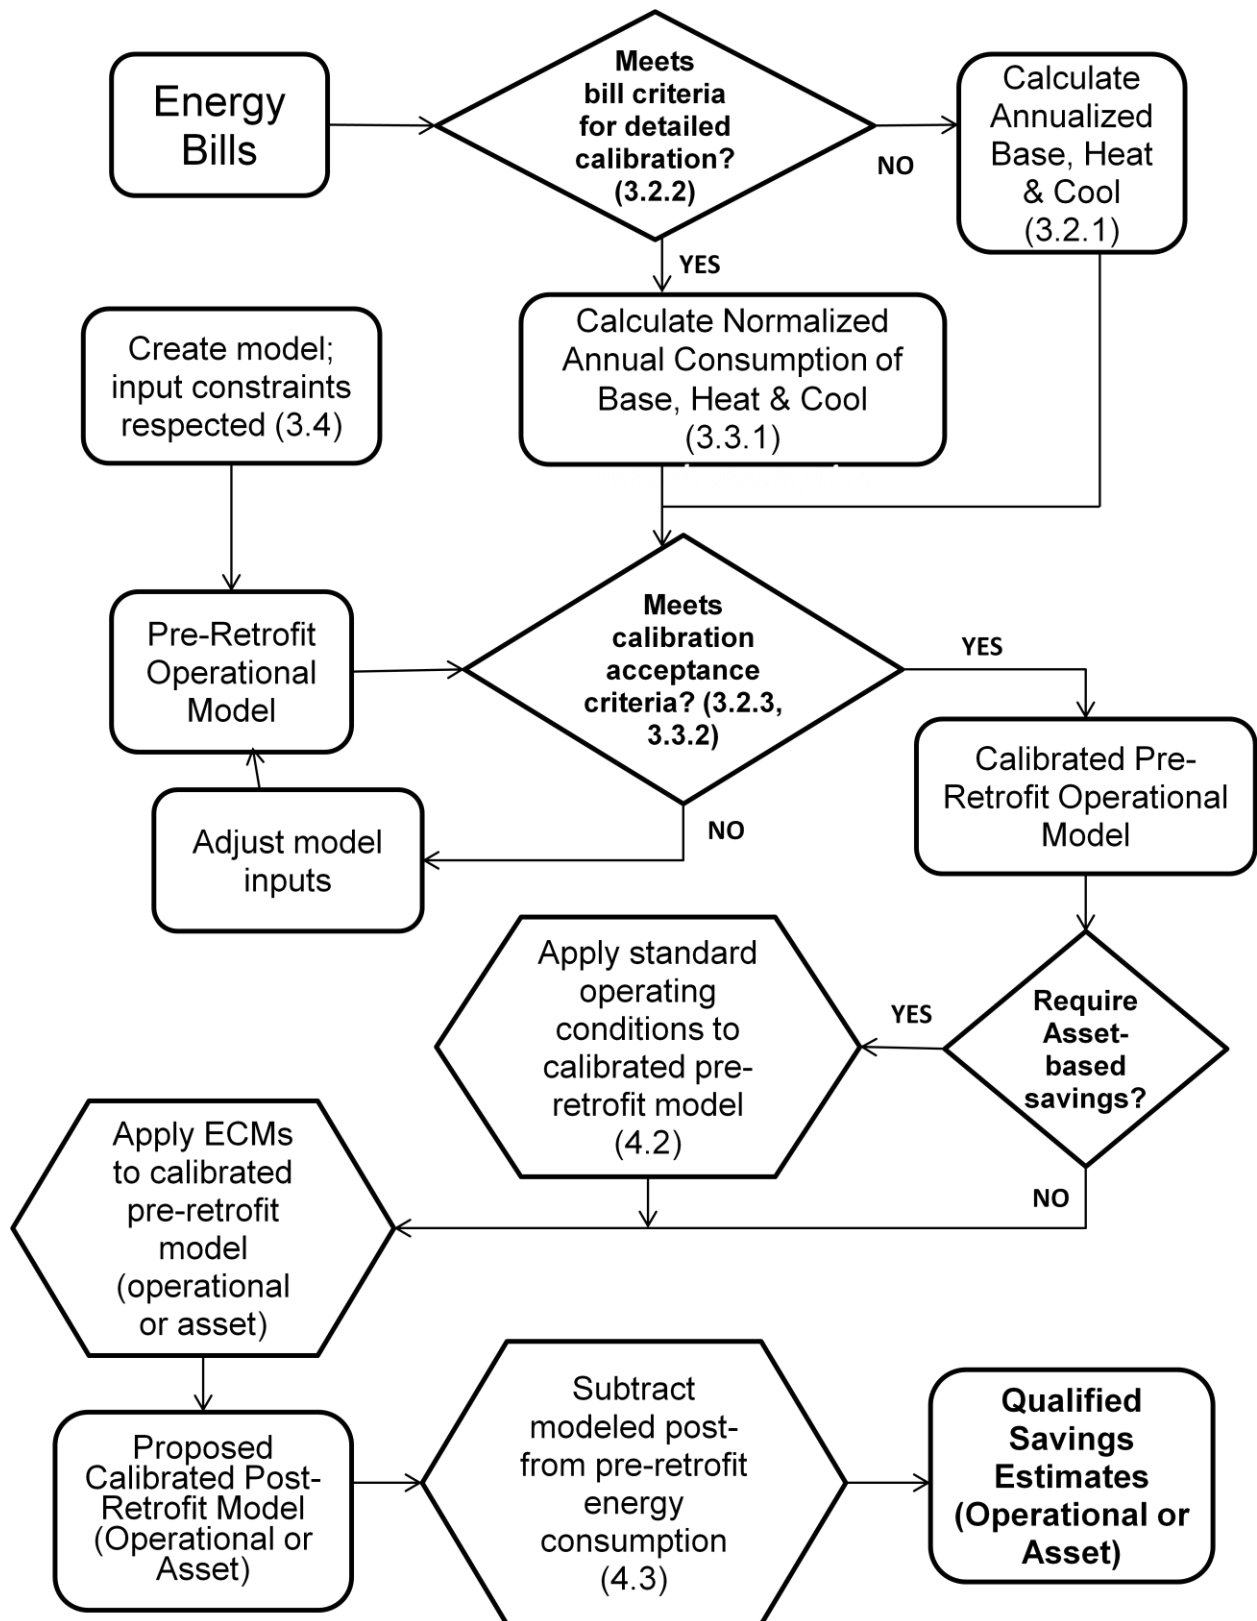

3. Energy Model Calibration Process

3.1. Energy Simulation Software Criteria

Building energy simulation software used in the analysis shall at a minimum meet the following requirements:

1. Pass the software verification tests listed in Section 4.2.1 of Procedures for Certifying Residential Energy Efficiency Tax Credits – RESNET Publication No. 06-001, Nov 7, 2011.
2. Be capable of reporting energy consumption separately, by fuel type, for the following end uses at a minimum: space heating, space cooling, water heating, lighting, and other appliances.

Input constraints shall be enforced by the reviewing body. Compliance with input constraints shall be identifiable to software users and to the reviewing body. An example of an input constraint on the pre-retrofit model would be not to allow any opaque wall surface to have an R-value less than a certain value.

3.2. Detailed Calibration

3.2.1. Detailed Calibration Procedure

A detailed calibration of an operational model shall be used for homes with available utility bills that meet data quality requirements outlined in Section 3.2.2, and for which the calibration criteria in Section 3.2.2 can be achieved. If the utility data and calibration do not meet these criteria for one or more fuel(s), then simplified calibration (Section 3.3) shall be used for those fuel(s). The detailed calibration requires the following steps:

- A. Determine that available utility bills meet the requirements of Section 3.2.2.
- B. Conduct a pre-retrofit operational model, respecting constraints in Section 3.4.
- C. Calibrate the operational model using one of two approaches: (a) weather-normalization of utility data, or (b) energy model with actual weather.
 - a. Weather-normalization of utility data:
 - i. Run the operational model, respecting the input constraints in Section 3.4, using normal (i.e. TMY2 or TMY3) weather assumptions.
 - ii. Run a regression of energy usage against local dry bulb temperatures or Heating Degree Day/Cooling Degree Day (HDD/CDD) for the time span of the usage data. This will separate baseload usage and determine temperature or degree-day dependence of heating and cooling usage for the period of the billing data, for each energy source. The regression shall be conducted using a linear or change-point linear model in accordance with ASHRAE Guideline 14, Annex D, Sections 1, 2, and 4.
 - iii. Weather-normalize the heating and/or cooling energy usage by applying the temperature-dependence of that usage determined in Step ii, to the normal weather conditions used for Step i, resulting in estimates of normalized baseload, heating, and cooling.
 - iv. Compare the modeled energy usage to the weather-normalized energy usage following the criteria of Section 3.2.2.A.
 - v. Input adjustments may be made to the operational model to meet the criteria of Section 3.2.2.A. This may be done by the user, or by the software, respecting all required input constraints in Section 3.4.

Note: When adjusting inputs to achieve an acceptable match between the operational model and the historical energy consumption, inputs with higher uncertainty shall be adjusted before inputs with low uncertainty; however, inputs that represent actual measurements or direct observations shall not be adjusted to achieve calibration. Examples of inputs with high uncertainty include the R-values of uninsulated assemblies, duct or shell leakage that is not measured, use intensity of miscellaneous electric loads such as dehumidifier, etc. The operational model that achieves an acceptable match is the calibrated pre-retrofit operational model.

or:

- b. Energy model with actual weather:
 - i. Run the operational model, respecting the input constraints in Section 3.4, using actual weather data representing the same time span as the utility billing period (including actual dry-bulb temperatures at a minimum; “actual weather data” may include actual or normal data for other weather conditions such as solar radiation).
 - ii. For each fuel, compare the modeled energy usage to the actual energy usage over the same billing period time spans, following the criteria of Section 3.2.2.B.
 - iii. Input adjustments ([refer to 3.2.1(C)(a)(v)]) may be made to the pre-retrofit operational model to meet the criteria of Section 3.2.2.B. This may be done by the user, or by the software, respecting all required input constraints in Section 3.4.
 - iv. Replace the actual weather data with normal (i.e., TMY2 or TMY3) weather to generate the calibrated pre-retrofit operational model.

3.2.2. Model Calibration Utility Bill Criteria

For metered energy sources such as electricity or natural gas, billing data shall be adequate to meet the following criteria:

- A. The most recent meter reading or usage measurement shall be within the past year;
- B. The date of each meter reading;
- C. The amount of energy use measured during that utility billing period;
- D. Estimated reads: For the purpose of weather-normalization of the utility bills, the date of an estimated reading shall be eliminated and the estimated energy use shall be added to the energy use corresponding to the following actual reading, over the total time span since the previous actual reading.
- E. Up to 2 of the billing periods may be eliminated from the analysis to account for atypical periods such as vacations.
- F. For fuels that provide heating or cooling, the usage data after accounting for estimated readings and vacation periods must meet either of the following criteria:
 - i. Span at least 330 days *or*
 - ii. Span more than 183 days *and*
 - if fuel provides heating:
 - total HDDs in time span $> 0.5 * HDD65_{TMY}$
 - at least one period with $HDD/day < 0.2 * HDD65_{TMY} / 365$
 - at least one period with $HDD/day > 1.2 * HDD65_{TMY} / 365$.
 - if fuel provides cooling:
 - total CDDs in time span $> 0.5 * CDD65_{TMY}$
 - at least one period with $CDD/day < 0.2 * CDD65_{TMY} / 365$
 - at least one period with $CDD/day > 1.2 * CDD65_{TMY} / 365$.

Where:

$HDD65_{TMY}$ = annual heating degree-days base 65°F from normal weather data (e.g., TMY2 or TMY3) consistent with the weather data used in the operational model

$CDD65_{TMY}$ = annual cooling degree-days base 65°F from normal weather data (e.g., TMY2 or TMY3) consistent with the weather data used in the operational model

- G. For fuels that provide heating or cooling, run a regression of energy usage against local dry bulb temperatures or HDD/CDD in accordance with section 3.2.1.C.a.ii. The Coefficient of Variation of the Root Mean Square Error (CVRMSE) of the regression results shall be determined using equation 3.2.2.G.i:

$$CVRMSE = 100 \times [\sum(y_i - \hat{y}_i)^2 / (n - p)]^{0.5} / \bar{y} \quad \text{Eqn. 3.2.2.G.i}$$

Where:

n = number of billing periods

y = the consumption from a single utility bill

$\hat{y}$ = the fitted value using the regression results for the same utility bill period

$\bar{y}$ = the arithmetic mean of the sample of n utility bills

p = the number of parameters in the regression analysis of the utility bills. For example, a variable-base heating degree day (change-point) analysis has 3 parameters: degree day base, slope, and baseload.

The acceptance limit for the bill regression is a CVRMSE of <=20%.

3.2.3. Detailed Model Calibration Acceptance Criteria

- A. Acceptance Criteria for Simulation results using Weather-Normalized Utility Data

The Bias Error (BE) and Absolute Error (AE) shall be determined using equations 3.2.3.A.i and 3.2.3.A.ii, respectively for each end-use (baseload, heating, and cooling).

$$BE = \frac{(x_i - \hat{x}_i)}{NAC} \times 100 \quad \text{Eqn. 3.2.3.A.i}$$

$$AE = |x_i - \hat{x}_i| \quad \text{Eqn. 3.2.3.A.ii}$$

Where:

x = the weather-normalized consumption from the regression for an end-use

$\hat{x}$ = the simulation predicted value for the same end-use

NAC = the normalized annual consumption from the weather normalization (sum of baseload, heating and cooling)

The acceptance criteria for calculated simulation results using weather-normalized utility data is *either* |BE| <= 5%, *or* an AE <= 5 Mbtu (5 * 10⁶ btu) (for fossil fuels) or AE <= 500 kWh (for electricity).

- B. Acceptance Criteria for Energy Model with Actual Weather

The Normalized Mean Bias Error (NMBE) and Coefficient of Variation of the Root Mean Square Error (CVRMSE) shall be determined using equations 3.2.3.B.i and 3.2.3.B.ii, respectively.

$$NMBE = \frac{\sum n(y_i - \hat{y}_i)}{(n-1)\bar{y}} \times 100 \quad \text{Eqn. 3.2.3.B.i}$$

$$CVRMSE = 100 \times [\sum(y_i - \hat{y}_i)^2 / (n - 1)]^{0.5} / \bar{y} \quad \text{Eqn. 3.2.3.B.ii}$$

Where:

n = number of billing periods

y = the consumption from a single utility bill

$\hat{y}$ = the simulation predicted value for the same utility bill period

$\bar{y}$ = the arithmetic mean of the sample of n utility bills

The acceptance limit for a calibrated energy model with actual weather is as follows: |NMBE| <= 5% and CVRMSE <= 20%.

3.3. Simplified Calibration

3.3.1. Simplified Calibration Procedure

A simplified calibration of an operational model may be used for delivered fuels if delivery receipts providing consumption that spans at least one year are available. It may also be used if metered energy bills do not meet the criteria of Section 3.2.2 but do meet the criteria of Section 3.3.2. The simplified calibration path requires the following steps:

- A. Determine that available delivery receipts or utility data meet the requirements of section 3.3.2.
- B. Run a pre-retrofit operational model, respecting the input constraints in Section 3.4.
- C. For each fuel used, determine the estimated annualized usage U_{ann} using equation 3.3.1.C.i.

$$U_{ann} = U_{raw} / \left(B_{fr} \times \frac{d}{365} + H_{fr} \times \frac{HDD65_{AW}}{HDD65_{TMY}} + C_{fr} \times \frac{CDD65_{AW}}{CDD65_{TMY}} \right) \quad \text{Eqn. 3.3.1.C.i}$$

Where:

U_{raw} = total raw (unadjusted) fuel usage for the entire period

B_{fr} = modeled baseload annual usage / modeled total annual usage for the fuel. $B_{fr}=0$ if the fuel is not used for baseload.

d = number of days spanned by the period

H_{fr} = modeled heating annual usage / modeled total annual usage. $H_{fr}=0$ if the fuel is not used for heating.

C_{fr} = modeled cooling annual usage / modeled total annual usage. $C_{fr}=0$ if the fuel is not used for cooling.

$HDD65_{AW}$ = heating degree-days base 65°F from actual weather data for the entire period

$HDD65_{TMY}$ = annual heating degree-days base 65°F from normal weather data (TMY2 or TMY3) consistent with the weather data used in the operational model

$CDD65_{AW}$ = cooling degree-days base 65°F from actual weather data for the entire period

$CDD65_{TMY}$ = annual cooling degree-days base 65°F from normal weather data (TMY2 or TMY3) consistent with the weather data used in the operational model

- D. Next, calculate the normalized heating, cooling, and baseload consumption using equations 3.3.1.D.i, 3.3.1.D.ii, and 3.3.1.D.iii:

$$NABU = U_{ann} \times B_{fr} \quad \text{Eqn. 3.3.1.D.i}$$

$$NAHU = U_{ann} \times H_{fr} \quad \text{Eqn. 3.3.1.D.ii}$$

$$NACU = U_{ann} \times C_{fr} \quad \text{Eqn. 3.3.1.D.iii}$$

Where:

NAHU = Normalized Annual Heating Usage

NACU = Normalized Annual Cooling Usage

NABU = Normalized Annual Baseload Usage

- E. For fuels using this calibration option, compare the modeled annual energy consumption for each end use, to the applicable NAHU, NACU, and NABU from Step D above. Input adjustments ([refer to 3.2.1.(C)(a)(v)]) may be made to the pre-retrofit operational model until the modeled consumption by end use is within 5% of the normalized annual consumption for that fuel and end use. This may be done by the user, or by software, respecting all required input constraints in Section 3.4.

3.3.2. Model Calibration Delivered Fuel Criteria

For delivered fuel sources such as oil, LP, or pellets, minimum information shall include:

- A. The date of the purchase(s) or deliveries based on receipt or delivery invoice from the fuel supplier for one year;
- B. The amount of fuel purchased or delivered;
- C. There shall be a minimum of 2 delivery records, and the time between the date of the first and last delivery record shall be 365 days or more.
- D. If the delivery records are detailed enough to meet the criteria under 3.2.1 above, then detailed calibration shall be used for delivered fuel. Otherwise, simplified calibration shall be used.

- E. If the delivery records do not meet the criteria under 3.2.1, the usage shall be calculated as the sum of all deliveries in the overall time span except for the first delivery, which assumes the tank is filled with each delivery.

3.4. Model Input Constraints

The following tables indicate the limits that shall be used for input values or intermediate calculation results for physical parameters of the building. If the approved software does not enforce these input constraints at the user input level, then the software shall provide the value used in the energy simulation, either as an explicit input or a displayed value, so that the user can ensure compliance with these constraints, or provide appropriate warnings to the user. These constraints directly apply to the pre-retrofit model; they apply implicitly to the post-retrofit model because the post-retrofit model shall only vary from the pre-retrofit model in the details of specifically modeled ECMs. Therefore, elements of the home that are not part of the package of ECMs shall be modeled identically in the pre-retrofit and post-retrofit models. In addition to the values below, distribution system efficiency (DSE) shall be calculated by the software based on user description of the physical duct system, whether measured or estimated (location, insulation levels, leakage) and not directly input as DSE. Enclosure air leakage values, if measured, shall be input as CFM at 50 Pa, or ACH at 50 Pa, and not as estimated “natural” CFM or ACH.

Table 3.4.i Input Constraints

Value	Minimum Value	Maximum value
Heating thermostat setpoint	58° F	76° F
Cooling thermostat setpoint	68° F	86° F
Domestic hot water setpoint	110° F	N/A
Forced-air furnace AFUE*	72%	N/A
Hot water / steam boiler AFUE*	60%	N/A
Heat Pump HSPF*	6.5	N/A
Heat Pump SEER*	9.0	N/A
Central air conditioner SEER*	9.0	N/A
Room air conditioner EER*	8.0	N/A
Gas-fired storage water heater EF*	0.50	N/A
Oil-fired storage water heater EF*	0.45	N/A
Electric storage water heater EF*	0.86	N/A
Interior lighting hours/day (average for home)	N/A	5
Value (including air films)	Maximum U-factor	
Uninsulated wood-frame wall	0.222	
Uninsulated masonry wall	0.250	
Uninsulated wood-frame ceiling with attic (R-value from interior to attic space)	0.286	
Uninsulated unfinished roof	0.400	
Uninsulated wood-frame floor	0.222	
Single-pane window, wood frame	0.714	
Single-pane window, metal frame	0.833	

* **Exception:** Where the labeled equipment efficiency exists for the specified piece of existing equipment, the labeled or measured steady state efficiency may be used in lieu of the applicable minimum input constraints.

Calculated distribution system efficiency (DSE) for ducted distribution systems shall be limited to the values in Table 3.4.ii for heating and/or cooling as applicable. For software that does not calculate an annual DSE, the DSE may be approximated by equation 3.4.i:

$$DSE \approx \frac{\text{Building Load}}{\text{Equipment Efficiency} \times \text{Consumption}} \quad \text{Eqn. 3.4.i}$$

Where:

Building Load = the modeled annual heating or cooling load of the building (as applicable)

Equipment Efficiency = the modeled efficiency of the equipment, independent of distribution system

For software that models equipment efficiency on an hourly basis, manufacturer's equipment performance rating (MEPR), converted to dimensionless units, may be substituted.

Consumption = the modeled total energy consumption for heating or cooling (as applicable), in the same units as Building Load

Table 3.4.ii Constraints on Ducted Distribution System Efficiency

Duct location	Minimum DSE
Conditioned Space	88%
Unconditioned basement or crawlspace (no insulation in walls or ceiling, or insulated walls)	85%
Unconditioned Basement or crawlspace (insulated ceiling)	75%
Vented crawlspace	70%
Garage	60%
Attic: heating DSE	60%
Attic: cooling DSE	50%

4. Savings Calculations

4.1. Operational Savings Calculation

Operational energy savings for existing home retrofits shall be determined by comparing a pre-retrofit calibrated operational model with a post-retrofit operational model. To create the post-retrofit operational model, ECMs shall be applied to the calibrated pre-retrofit operational model. Any input adjustments made to the pre-retrofit model to calibrate to the normalized annual usage shall be duplicated in the post-retrofit model, with the exception of inputs altered specific to application of the ECMs. The difference in modeled fuel usage between the calibrated pre-retrofit operational model and the post-retrofit operational model is the operational savings for the proposed ECMs.

4.2. Asset-Based Savings Calculation

Asset-based energy savings for existing home retrofits shall be determined by taking the difference between a pre-retrofit calibrated model and a post-retrofit calibrated model, as described in Section 4.1, and additionally in accordance with the provisions of this section.

4.2.1. Pre-Retrofit Asset Model

The pre-retrofit asset model for the purposes of determining the asset-based energy savings of a set of ECMs shall be the original configuration of the existing home, as calibrated in accordance with Sections 3.2.1 and/or 3.3.1, with the following exceptions:

- A. The pre-retrofit asset model shall include the full complement of lighting, appliances, and residual miscellaneous energy use as specified by Tables 303.4.1.7.1(1) and 303.4.1.7.1(2) of the 2006 Mortgage Industry National Home Energy Rating System Standards dated November 15, 2011 (hereinafter "the RESNET HERS Standards").
- B. Where multiple appliances of the same type exist in the original configuration of the existing home, the same number of those appliance types shall be included in the pre-retrofit asset model.

- C. Where a standard appliance, as shown in Tables 303.4.1.7.1(1) and 303.4.1.7.1(2) of the RESNET HERS Standards, does not exist in the original configuration of the existing home, the standard default energy use and internal gains as specified by Table 303.4.1(3) of the RESNET HERS Standards for that appliance shall be included in the pre-retrofit asset model.
 - a. Large permanently-installed end-uses that are not covered by the RESNET Standards (e.g., swimming pool, spa, driveway/sidewalk snowmelt system) shall be included in the asset model as configured in the calibrated operational model.
- D. Standard operating conditions in accordance with Section 3.4 of this standard shall be applied to the pre-retrofit asset model.

4.2.2. Post-Retrofit Asset Model

The post-retrofit asset model for the purpose of determining the asset-based energy savings of a set of ECMs shall be the existing home's configuration in accordance with Section 4.2.1 of this standard, including all ECMs, and including the full complement of lighting, appliances, and residual miscellaneous energy use contained in the home after all energy improvements have been implemented.

- A. Where an appliance has been upgraded but the existing appliance is not removed from the existing home property, both the new and existing appliance shall be included in the post-retrofit model.¹
- B. Where a standard appliance as shown in Tables 303.4.1.7.1(1) and 303.4.1.7.1(2) of the RESNET HERS Standards does not exist in the improved configuration of the existing home, the standard default energy use and internal gains as specified by Table 303.4.1(3) of the RESNET HERS Standards for that appliance shall be included in the post-retrofit asset model.
- C. Improvements in lighting and appliance energy use in the post-retrofit model shall be calculated in accordance with Section 303.4.1.7.2 of the RESNET HERS Standards.
 - a. Large permanently-installed end-uses that are not covered by the RESNET Standards (e.g., swimming pool, spa, driveway/sidewalk snowmelt system) shall be included in the post-retrofit asset model as configured in the calibrated operational model. Where a pool pump is replaced as part of the ECMs, the reduced electric consumption of the new pump may be included in the post-retrofit asset model.
- D. Standard operating conditions in accordance with Section 4.2.3 of this standard shall be applied to the post-retrofit asset model.

4.2.3. Standard Operating Conditions

- A. Both the pre- and post-retrofit asset models shall be configured in accordance with the Rated Home specifications of Table 303.4.1(1) of the RESNET HERS Standards, where "same as rated home" shall be taken to mean "same as the pre- and post-retrofit home being modeled" for the purpose of this standard.

Exceptions:

- a. Both the pre- and post-retrofit asset model configurations shall not violate the input constraints specified in Section 3.4 of this standard;
- b. Roofs shall be "same as rated home" as modeled in the calibrated operational model;
- c. Crawlspace shall be "same as rated home" as modeled in the calibrated operational model;
- d. Glazing/external shading may include exterior, fixed, non-architectural shading (trees, buildings, etc), as modeled in the calibrated operational model;
- e. Air exchange rate shall be "same as rated home" as modeled in the calibrated operational model;
- f. Internal mass shall be "same as rated home" as modeled in the calibrated operational model;
- g. Thermal distribution systems shall be "same as rated home" as modeled in the calibrated operational model.

¹ For example, if a refrigerator is upgraded to a more efficient model and the original refrigerator is kept on property for potential use as a second refrigerator, both refrigerators shall be included in the post-retrofit asset model.

4.3. Total Energy Savings Calculations

4.3.1. Equivalent Energy Use

Energy units used in the calculation of *total energy savings* and *energy savings percentage* shall be in units of Equivalent Electric Power, using equivalent electric energy for all fossil fuels. Equivalent electric energy use shall be calculated using Equation 4.3.1.i:

$$kWh_{eq} = kWh_{elec} + \frac{Btu_{fossil} * 0.4}{3412} \quad \text{Eqn. 4.3.1.i}$$

4.3.2. Total Energy Savings

Total energy savings shall be calculated as the difference between the whole-house projected equivalent energy use of the pre-retrofit model and the whole-house projected equivalent energy use of the post-retrofit model. Total energy savings shall be calculated for the calibrated operational model, except when a client, sponsor, lender, or other interested third party requires an asset-based total energy savings, in which case the asset-based model is used.

4.3.3. Energy Savings Percentage

The energy savings percentage of the retrofit shall be calculated as the whole-house equivalent energy savings as determined in Section 4.3.1 above, divided by the whole-house equivalent energy use of the pre-retrofit model, multiplied by 100. Energy savings percentage shall be calculated for the calibrated operational model, except when a client, sponsor, lender, or other interested third party requires an asset-based energy savings percentage in which case the asset-based model is used.

Annex A: Referenced Documents (Normative)

Procedures for Certifying Residential Energy Efficiency Tax Credits – RESNET Publication No. 06-001, Revised Nov 7, 2011. Residential Energy Services Network, Inc., P.O. Box 4561, Oceanside, CA 92052-4561; www.resnet.us.

2006 Mortgage Industry National Home Energy Rating Systems Standards, November 15, 2011. Residential Energy Services Network, Inc., P.O. Box 4561, Oceanside, CA 92052-4561; www.resnet.us.

ASHRAE Guideline 14-2002, Measurement of Energy and Demand Savings, ASHRAE Guideline 14, 2002. American Society of Heating, Refrigerating and Air-Conditioning Engineers, 1791 Tullie Circle NE, Atlanta, GA 30329; www.ashrae.org.

Annex B: Terms and Definitions (Normative)

Approved building energy simulation software

Software tools meeting the minimum requirements of Section 3.1

Asset model

Whole-building energy simulation in which occupancy-related factors are configured to represent a standardized set of operating conditions

Asset-based savings

Savings estimate produced from the delta simulation using the same standard operating conditions and standard weather conditions in both the pre-retrofit and post-retrofit models to eliminate occupant behavior and weather variations

Note: Asset-based savings may be required for the purpose of real estate listing or financing

Baseload

Energy or fuel that is consumed by household devices that has little to no dependence on outside air temperature including, but not limited to, lighting, kitchen and cleaning appliances, domestic hot water, and electronics

Calibrated model

Whole-building energy simulation in which the inputs are adjusted so that the modeled pre-retrofit energy consumption is within an acceptable range of the weather-normalized energy consumption

Coefficient of variation of the root mean square error: CVRMSE

Measures variability (or spread) in the data

Delivered fuels

Fuel that is delivered to and stored on the site including, but not limited to, fuel oil, LP gas, wood, coal, and pellets

Delta simulation

Difference in energy consumption estimates between a pre-retrofit model and a post-retrofit model, using the same operating conditions and weather assumptions, where the difference between the modeled energy consumption of the two models is considered the estimated savings (for each fuel used)

Energy conservation measures (ECM)

Proposed improvement or a package of proposed improvements to a building intended to reduce energy consumption

Input constraints

Limitations to certain inputs used in the pre-retrofit model which provides reasonable limits on savings estimates for particular ECMs

Metered energy

Energy or fuel for which consumption data is collected over time using a metering device or devices including, but not limited to, electricity and natural gas

Normalized mean bias error (NMBE)

Verifies that energy usage estimated by the energy model is within acceptable range from the annual average usage based on utility bills for each energy source

Operational model

Whole-building energy simulation in which major occupancy-related factors are configured to represent actual operating conditions as accurately as practical

Note: For example, thermostat settings/schedule, occupancy schedule, frequency/intensity of lighting and appliance usage, window shading, and energy consumption of other amenities (including seasonal uses) are represented to the extent possible in the simulation software.

Operational-based savings

Savings estimate produced from the delta simulation using the same actual operating conditions and standard weather conditions in both the pre-retrofit and post-retrofit models, to simulate projected occupant behavior, while eliminating weather variations

Note: Operational savings may be used to demonstrate estimated performance improvements to current building owners or occupants.

Post-retrofit model

Simulation based on a physical description of the house's state after the ECMs are installed, based on the projected installation of ECMs, or (when available) a post-installation inspection of the home

Pre-retrofit model

Simulation based on a physical description of the house as it exists prior to installation of ECMs

Reviewing body

Agent identified as the implementer of a quality assurance process. This may be an accrediting body or a third party identified by a program sponsor or the accrediting body

Townhouse

A single-family dwelling unit which was designed to have continuous party walls with no penetrations to adjacent units, with such party walls extending from ground to roof where the dwelling unit is attached to one or more adjacent single-family dwelling units

Annex C: Quality Assurance (Informative)

This Annex is written in normative language so that a user of this standard may choose to include one of the quality assurance procedures listed in this Annex. The user shall specify which level (1 – 4) of quality assurance they require.

Quality Assurance (QA) as applied to this standard is a system for verification that the modeling was conducted in accordance with the criteria established by this Standard. A quality assurance program helps ensure that the software-based savings predictions are accurate and reduces bias and other sources of error. There are several areas in which the overall quality assurance process helps assure that the projected savings will be realized with a high degree of confidence:

1. Self-enforcement of requirement that the auditor meet the criteria of this Standard
2. Third party review that the submitted model and analysis meet the criteria of this Standard
3. Third party detailed hand review through the model and analysis
4. Third party field review based on the outcome of the model review

C.1 Self-Enforcement of Meeting this Standard

The first step in quality assurance is self-review and self-enforcement by the auditor conducting the energy audit as per the requirements of this Standard. The auditor shall review his or her work prior to submitting it to the program administrator to ensure that it is in full compliance with the Standard.

In cases in which the audit is not in full compliance with BPI-2400-S-2012, the auditor shall submit documentation regarding the reasons for the lack of compliance, together with the energy model(s). For example, if the auditor believes there is reason for an exception to the minimum R-value of an uninsulated wall required by Section 3.4(Input Constraints), then they shall supply documentation stating their rationale.

C.2 Third Party Minimum Model QA

The program administrator or other reviewing entity conducting QA shall verify that the submitted model and analysis meets the criteria of this standard by reviewing the energy audit and asking the following questions:

1. Is the model within acceptable calibration limits?
2. Were all constraints listed in Section 3.4 met?
3. If asset-based savings are being reported, were the standardized operating conditions applied correctly?

If any criteria of this standard are not met by the submitted model and analysis, the submission shall be returned to the auditor for correction and re-submission.

Additionally, the reviewing body should check that the workscope and/or report shows evidence of testing health and safety issues and addresses them as necessary in accordance with BPI draft standard 1100-S.

C.3 Third Party Detailed Model QA

A detailed model QA shall be done on the first 3 submissions from an auditor or contractor and then on 5% of their submission thereafter. The detailed review shall include, but not be limited to, the following actions:

1. Checking that the inputs and outputs from the model are reasonable for the house described in the report;
2. Checking that the parameters used for each ECM in the workscope are reasonable and conservative;

3. Performing the utility analysis from the raw metered or delivered energy data to determine whether or not the submitted results match, especially regarding the elimination of any energy data called out in Section 3.2.2.E.

C.4 Third Party Field Review Based on Model QA

Field-based quality assurance is more robust and more expensive. The analysis of energy model performance will be an enhancement of that process. Field inspections shall be performed for jobs identified through the random and automated review processes, based on criteria developed by the reviewing body.

C.5 Enforcement

Adverse results will require enforcement. The criteria developed by the reviewing body shall define progressive disciplinary action, up to and including suspension and loss of accreditation, based on the results of quality assurance reviews. Such process shall include mechanisms for appeal and a due process to provide for reinstatement of accreditation.

Annex D: Application of this Standard (Informative)

The *Standard Practice for Standardized Qualification of Whole House Energy Savings Predictions by Calibration to Energy Use History* provides a specific process to limit the estimation of savings based on historical usage analysis, standardized limits on input assumptions, and standardized operating conditions as specified. This standard may be used “as-is” in its entirety. However, when cited by a program sponsor, lender, or government agency, that party may decide to only allow detailed calibration process and decide what alternatives may be allowed or whether the simplified calibration process will be allowed. Incentives and tax credits could be designed by tiers, tied to compliance with the two calibration paths. For example, the program may decide that if a house uses any stored energy source, all analysis shall be done using the simplified calibration approach. Alternatively, the program could specify that if the stored energy source is less than a certain percent of the total energy usage of the house, then the detailed calibration approach may only be used on the metered fuel(s).

This standard, while adequate as a standalone procedure, is intended to be flexible to allow for a particular energy efficiency program or sponsor to substitute values for acceptance criteria, input constraints, and/or standardized operating conditions as appropriate. This will enable the standard to meet the needs of a variety of supporting energy efficiency tax credit programs, state and national efficiency programs, and utility programs.

Annex E: Building Performance Institute, Inc. Types of Standards (Informative)

The Building Performance Institute, Inc. (BPI) develops technical standards, certifications, accreditations, and related technical documents (e.g., Guidelines, Bulletins, Standard Work Specifications) to support the safe and effective improvement of energy performance in existing residential buildings (including multi-family). These elements reside within a family of related types where they build on each other.

The structure of BPI Standards is made up of six distinct types: Materials Standards, Material Test Methods, Installation Standards, Application Standards, Standard Practices and Standard Specifications. The following overview provides a description of each of these types, and how they relate to each other in order to create a comprehensive and unified structure.

Materials Standards are perhaps the easiest member of the family to understand. They define the performance requirements of particular materials. Material standards include methods of testing to confirm acceptability, as well as establishing the performance characteristics of materials under specific conditions. A material standard would be applicable to the manufacturers of the materials and would include all requirements that a manufacturer shall meet. A material standard includes requirements for material labeling and requirements for the documentation that a manufacturer would need to provide.

Material Test Method Standards are used to outline the process to conduct a standardized test to determine the performance of a material. Test methods are normally for laboratories and do not include performance requirements. (That is, test methods do not dictate how well a material shall perform, but simply how to test for its level of performance.) An example of a test method is the BPI standard on the air retarder properties of loose fill insulation. In a test method standard, the outcome would be a test report.

Installation Standards provide requirements for the installation of a specific material or product and are limited to that particular material or product. The installation standards are applicable no matter where the material would be installed and no matter what function the material is intended to provide. For example, loose fill fibrous insulation ALWAYS needs proper setup of the equipment to ensure that the fibers are adequately separated as they are being delivered. This is achieved by machine settings, length and configuration of hose, nozzle size and other factors that are covered in the installation standard. Installation standards cover everything that is needed for proper installation of the material, which may include health and safety requirements for the installer, other workers and occupants.

Application Standards are requirements for a specific function and would reference material standards and installation standards. For BPI application standards, the function will be identified along with all the materials that could provide that function for a specific location in a building. As an example, if you developed a Building Insulation Application standard, the standard would be broken down by location. In the location of attic floors, it would then lay out all of the requirements to provide the function of thermal insulation at that location. The Building Insulation Application standard would require that the attic floor be prepared before the installation of the thermal insulation. Preparation would include confirming that:

- the attic floor is air sealed,
- the proper amount of attic ventilation is provided in the correct locations,
- the electrical wiring is appropriate,
- the appropriate shielding is in place for heat emitting devices so that they do not come in contact with the insulation.

After all the items required for attic preparation have been met, then the installation of the insulation would commence using material that meets the material standard and it would be installed in accordance for the installation standard for that material.

Standard Practice Standards provide requirements for conducting a procedure normally done outside of a laboratory. An example of a standard practice is ASTM E 779, which specifies how a blower door test is conducted, but does not specify how tight a building should be. In a standard practice, the outcome would be a report.

Standard Specification Standards outline performance requirements and references other standards as to how you would confirm that the specification requirements have been met. As an example, an air tightness specification for a home or building would specify a maximum air leakage rate, and reference ASTM E 779 for how to measure it.

